

HG[®]

FLOORS

tile stain remover

for grease and oil stains

PRODUCT 21

500 ml e

HG tile stain remover (product 21)

- for grease and oil stains
- for porous flagstone, natural stone and concrete

For the removal of grease and oil stains from tiles, paving stones, natural stone, concrete and cement. *HG tile stain remover* is also suitable for removing epoxy grouting residues.

Directions for use:

To remove spots: Shake *HG tile stain remover* well and pour it over the areas to be treated. In case of severe staining this product can be used undiluted. For less severe staining *HG tile stain remover* can be diluted to a maximum of 1:5 with (preferably) warm water. Scrub with a stiff broom or a brush. Leave to penetrate for 5 to 10 minutes and then rinse with plenty of water. For very absorbent surfaces the treatment may need to be repeated once or twice.

To remove epoxy grouting residues: Shake *HG tile stain remover* well before using and apply undiluted. Scrub briefly and then leave to penetrate for about 20 minutes and scrub again. Rinse with plenty of water.

Attention: Transport and store the bottle upright. If the floors have a protective coating, that coating may also be removed by *HG tile stain remover*. Apply (to the affected areas) a new protective coating after the treatment with *HG tile stain remover*. Avoid splattering onto painted or varnished surfaces. Remove spilled liquid immediately with plenty of water. Ventilate well when using this product.

Medical personnel can request the data sheet via +31 36 54 94 777
The consumer's information sheet can be obtained via www.HG.eu




0516600105006
2105

Product and tips? See:

HG.EU

Consumer Services?
Call: +44 (0)1279 598360

contains a.o.:	
aromatic hydrocarbons	> 30%
non-ionic surfactants	5-15%
anionic surfactants, phosphates	< 5%
preservation agents: 2-bromo-2-nitropropane-1,3-diol	

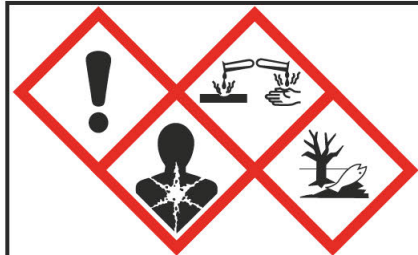

DANGER H318- Causes serious eye damage. **H304-** May be fatal if swallowed and enters airways. **H335-** May cause respiratory irritation. **H336-** May cause drowsiness or dizziness. **H411-** Toxic to aquatic life with long lasting effects. **P101-** If medical advice is needed, have product container or label at hand. **P102-** Keep out of reach of children. **P261-** Avoid breathing vapours. **P271-** Use only outdoors or in a well-ventilated area. **P280-** Wear protective gloves and eye protection. **P301+P310-** IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. **P305+P351+P338-** IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. **P331-** Do NOT induce vomiting. **P501-** Dispose of contents and container in accordance with all local, regional, national and international regulations. Contains: Solvent naphtha (petroleum), light aromatic, EINECS: 265-199-0, Alkyl monoethanolamide ethoxylate EINECS: 607-851-2

Made in The Netherlands by HG International b.v.,
Damsluisweg 70, 1332 EJ Almere, The Netherlands,
Tel.: +31 36 54 94 700

HG Does what it promises.

UK importer: HG Hagesan (UK) Ltd, Weston Business Centre, Parsonage Road, Takeley, Essex, CM22 6PL
Tel.: +44 (0) 1206 822 744